

# Efficiency of heat engines coupled to nonequilibrium reservoirs

Obinna Abah<sup>1,2</sup> and Eric Lutz<sup>2</sup>

<sup>1</sup>*Department of Physics, University of Augsburg, D-86135 Augsburg, Germany*

<sup>2</sup>*Dahlem Center for Complex Quantum Systems, FU Berlin, D-14195 Berlin, Germany*

We consider quantum heat engines that operate between nonequilibrium stationary reservoirs. We evaluate their maximum efficiency allowed by the second law of thermodynamics. We show that it can be expressed in terms of an effective temperature that depends on the nature of the reservoirs. We further compute the efficiency at maximum power for different kinds of engineered reservoirs.

PACS numbers: 05.30.-d, 03.65.-w

Engines are devices that convert various forms of energy into useful mechanical work and motion. In thermodynamics, two different kinds of machines can be distinguished. On the one hand, there are heat engines that operate between two reservoirs at different temperature, such as internal combustion engines [1, 2]. On the other hand, there are molecular motors that are driven from equilibrium by varying external parameters, while in contact with a single isothermal reservoir [3, 4]. The latter describe biological motor proteins as well as artificial nanomachines [5, 6]. An essential characteristic of any machine is its efficiency defined as the ratio of work output to energy input. Whereas for heat engines the efficiency is limited by the Carnot formula,  $\eta_c = 1 - T_1/T_2$ , where  $T_1$  and  $T_2$  are the temperatures of the two thermal reservoirs ( $T_1 < T_2$ ), it can reach unity for molecular motors [7–9]. Maximum efficiency usually corresponds to quasistatic conditions, and therefore to zero power. A practically more relevant quantity is thus the efficiency at maximum power which for heat engines is given by  $\eta_c/2$  for small temperature differences [10–12]. For molecular motors, the efficiency at maximum power can reach the thermodynamic limit 1 for strong driving [13, 14].

Heat engines are usually assumed to be in contact with two equilibrium reservoirs. In this paper, we investigate the more general case where the engine runs between stationary nonequilibrium reservoirs. In a sense, this situation interpolates between traditional heat engines and molecular motors. Indeed, the efficiency of these heat engines can be larger than the Carnot efficiency and they can operate isothermally. Our study is motivated by the recent advent of reservoir engineering techniques in quantum optical systems, such as ion traps [15, 16], microwave cavities [17, 18], optical lattices [19, 20] and optomechanical systems [21], that enable the preparation of nonthermal environments. In addition, theoretical studies have shown in individual cases that the efficiency of heat engines coupled to nonthermal quantum coherent [22] or quantum correlated [23] reservoirs can sometimes exceed the Carnot limit. The two fundamental questions that we here address are therefore: i) under what conditions can the efficiency be enhanced beyond Carnot, and ii) what is the maximum (universal) efficiency that can be reached? In the following, we consider a quantum heat engine coupled to general stationary nonthermal reser-

voirs. It will be convenient to regard these reservoirs as perturbed thermal reservoirs, although the perturbation need not be small. They will then be characterized by a temperature and a second parameter (or more) that quantifies the deviation from equilibrium, such as the degree of quantum coherence [22] or the amount of quantum correlations [23]. We begin by performing a detailed analysis of the quantum Otto cycle for a time-dependent harmonic oscillator, a paradigm of quantum heat engines and a generalization of the common four-stroke car engine [24–28]. We evaluate its efficiency which we express in terms of the Hamiltonian of mean force [29, 30], a quantum extension of the potential of mean force well-known in the statistical theory of fluids [31]. We further derive an explicit expression for the maximum efficiency of any heat engine allowed by the second law of thermodynamics; this efficiency may be smaller or larger than the Carnot efficiency depending on the properties of the reservoirs. We will use the latter to obtain a criterion for the increase of the efficiency beyond the Carnot bound. Finally, we compute the efficiency at maximum power of the Otto engine for the concrete examples of strongly coupled, coherent and correlated quantum reservoirs.

*Quantum Otto engine.* We consider a quantum Otto engine whose working medium is a harmonic oscillator with time-dependent frequency  $\omega_t$  [24–28]. The Otto cycle consists of two isentropic processes during which the frequency is unitarily varied between  $\omega_1$  and  $\omega_2$ , and of two isobaric (constant frequency) processes during which the oscillator is connected to two different reservoirs (see Fig. 1). A concrete scheme to experimentally realize such an engine using a single ion in a linear Paul trap has been proposed in Ref. [28]. In the usual Otto cycle, the two reservoirs are assumed to be thermal and characterized by the inverse temperatures  $\beta_i = 1/(k_B T_i)$ , ( $i = 1, 2$ ), where  $k_B$  is the Boltzmann constant. Here, we examine the situation where the engine is alternately coupled to engineered nonthermal reservoirs. For simplicity, we will first focus on the case where only the hot reservoir is nonthermal. When connected to this reservoir, the oscillator relaxes to a nonequilibrium state that we write in the general form,  $\rho_2 = \exp[-\beta_2(H_2 + \Delta H_2)]/Z_2^*$ , where  $H_2 = p^2/(2m) + m\omega_2^2 x^2/2$  is the Hamiltonian of the oscillator at frequency  $\omega_2$  ( $m$  denotes the mass) and  $Z_2^*$  the normalization constant. The operator  $\Delta H_2$  quanti-

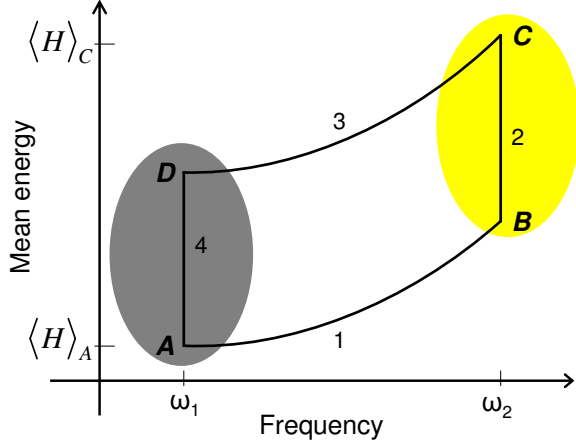


FIG. 1: (Color online) Energy-frequency diagram of the quantum Otto engine. The thermodynamic cycle consists of two isentropic (stroke 1 and 3) and two isochoric (stroke 2 and 4) processes. In the latter, the heat engine is coupled to engineered nonthermal stationary reservoirs that are described by a temperature and additional parameters that characterize the deviation from thermal equilibrium.

fies the departure from equilibrium and may be arbitrary [32]. We note that the operator  $H_2^* = H_2 + \Delta H_2$  can be seen as a Hamiltonian of mean force [29, 30]. It is important to stress that the state  $\rho_2$  should be centered,  $\langle x \rangle = \langle p \rangle = 0$ , so that the nonequilibrium reservoir is a proper heat source that can only exchange heat with the engine, but no work [33]. The mean energy of the harmonic oscillator in the nonequilibrium state is then,

$$\langle H_2^* \rangle = \hbar\omega_2(\bar{n}_2 + \Delta\bar{n} + 1/2), \quad (1)$$

where  $\bar{n}_i = [\exp(\hbar\beta_i\omega_i) - 1]^{-1}$  is the mean occupation number of a thermal quantum oscillator and  $\Delta\bar{n}$  that associated with the deviation from the thermal state.

During the two isentropic parts of the thermodynamic cycle (stroke 1 and 3), the time-dependent oscillator is isolated and its dynamics is hence unitary. As a result, its Schrödinger equation can be solved exactly using a Gaussian wave function ansatz and the mean energy can be evaluated analytically [34–36]. During the two isochoric branches (stroke 2 and 4), the oscillator relaxes respectively to a nonequilibrium and an equilibrium state. The corresponding average energies of the harmonic oscillator at the four corners of the quantum Otto cycle are,

$$\langle H \rangle_A = \hbar\omega_1(\bar{n}_1 + 1/2), \quad (2a)$$

$$\langle H \rangle_B = \hbar\omega_2 Q_1^* (\bar{n}_1 + 1/2), \quad (2b)$$

$$\langle H \rangle_C = \hbar\omega_2 (\bar{n}_2 + \Delta\bar{n} + 1/2), \quad (2c)$$

$$\langle H \rangle_D = \hbar\omega_1 Q_2^* (\bar{n}_2 + \Delta\bar{n} + 1/2), \quad (2d)$$

where we have used Eq. (1) and Eq. (5.12) of Ref. [34]. We note that the energies at point C and D are modified by the presence of the nonthermal reservoir. The two

parameters  $Q_1^*$  and  $Q_2^*$  characterize the degree of adiabaticity of the compression and expansion phases 1 and 3 [34]. Their explicit expressions for any given frequency modulation  $\omega_t$ , can be found in Refs. [35, 36]. They are, for example, equal to one for adiabatic processes and to  $(\omega_1^2 + \omega_2^2)/(2\omega_1\omega_2)$  for a sudden frequency change.

To evaluate the efficiency of the Otto engine, we need to compute work and heat along the four branches of the cycle (see Fig. 1). The mean works, denoted by  $\langle W_1 \rangle$  and  $\langle W_3 \rangle$ , done during stroke 1 and 3 are given by,

$$\langle W_1 \rangle = \langle H \rangle_B - \langle H \rangle_A = (\hbar\omega_2 Q_1^* - \hbar\omega_1)(\bar{n}_1 + 1/2), \quad (3)$$

$$\langle W_3 \rangle = \langle H \rangle_D - \langle H \rangle_C = (\hbar\omega_1 Q_2^* - \hbar\omega_2)(\bar{n}_2 + \Delta\bar{n} + 1/2).$$

At the same time, the mean heats,  $\langle Q_2 \rangle$  and  $\langle Q_4 \rangle$ , exchanged with the reservoirs during stroke 2 and 4 read,

$$\begin{aligned} \langle Q_2 \rangle &= \langle H \rangle_C - \langle H \rangle_B \\ &= \hbar\omega_2(\bar{n}_2 + \Delta\bar{n} + 1/2) - \hbar\omega_2 Q_1^* (\bar{n}_1 + 1/2), \end{aligned} \quad (4)$$

$$\begin{aligned} \langle Q_4 \rangle &= \langle H \rangle_A - \langle H \rangle_D \\ &= \hbar\omega_1(\bar{n}_1 + 1/2) - \hbar\omega_1 Q_2^* (\bar{n}_2 + \Delta\bar{n} + 1/2). \end{aligned}$$

The efficiency, defined as the ratio of the total work per cycle,  $\langle W \rangle = -(\langle W_1 \rangle + \langle W_3 \rangle)$ , to the heat received from the hot reservoir,  $\langle Q_2 \rangle$ , can then be written as,

$$\eta = 1 - \frac{\omega_1}{\omega_2} \frac{(\bar{n}_1 + 1/2) - Q_2^* (\bar{n}_2 + \Delta\bar{n} + 1/2)}{Q_1^* (\bar{n}_1 + 1/2) - (\bar{n}_2 + \Delta\bar{n} + 1/2)}. \quad (5)$$

The above quantum expression is exact. It gives the finite time efficiency of the quantum Otto engine for any frequency modulation  $\omega_t$ , any inverse temperature  $\beta_i$ , and any nonequilibrium stationary reservoir.

*Maximum efficiency.* The second law of thermodynamics limits the efficiency of any heat engine, in contact with either equilibrium or nonequilibrium reservoirs. We next derive the maximum efficiency of a heat engine operating between a cold thermal reservoir and a hot nonthermal reservoir using Eq. (5). According to the Clausius statement of the second law "Heat cannot, by itself, pass from a colder to a hotter body" [37]. As a result, heat is absorbed from the hot reservoir,  $\langle Q_2 \rangle \geq 0$ , and flows into the cold reservoir,  $\langle Q_4 \rangle \leq 0$  [33]. The latter yields the following two conditions:

$$\frac{\bar{n}_2 + \Delta\bar{n} + 1/2}{\bar{n}_1 + 1/2} \geq Q_1^*, \quad \frac{\bar{n}_1 + 1/2}{\bar{n}_2 + \Delta\bar{n} + 1/2} \leq Q_2^*. \quad (6)$$

Maximum efficiency is achieved for adiabatic frequency modulations which correspond to  $Q_{1,2}^* = 1$ . Combining Eqs. (5) and (6) in the high-temperature limit,  $\bar{n}_i + 1/2 \simeq 1/(\hbar\beta_i\omega_i)$ , we therefore find,

$$\eta \leq \eta_c + \hbar\beta_2\omega_1\Delta\bar{n} = \eta_c + \beta_2 \frac{\omega_1}{\omega_2} \langle \Delta H \rangle_C, \quad (7)$$

where  $\langle \Delta H \rangle_C = \langle H \rangle_C - \langle H \rangle_C^{\text{eq}} = \hbar\omega_2 \langle \Delta \bar{n} \rangle$  is the deviation of the energy of the oscillator from its equilibrium value at point  $C$ . Equation (7) reduces to the Carnot efficiency, the universal upper bound for any heat engine running between thermal reservoirs when  $\langle \Delta H \rangle_C = 0$ . In the general case, it extends the Carnot formula to heat engines operating between a thermal and a nonthermal stationary reservoir. Efficiency (7) exceeds the Carnot efficiency  $\eta_c$  if and only if  $\langle \Delta H \rangle_C > 0$ . The latter condition corresponds to a larger area of the thermodynamic cycle Fig. 1, and thus to a larger work output.

Expression (7) agrees with the maximum efficiency of a quantum Carnot engine in contact with either a quantum coherent [22] or a quantum correlated [23] reservoir (see below), obtained in the limit of small deviations from equilibrium. Equation (7), however, is not limited to the close to equilibrium regime; it thus provides an extension of the results derived in Refs. [22, 23] to far from equilibrium reservoirs. Moreover, using Eq. (6), we may rewrite the maximum efficiency (7) in the form,

$$\eta_{\text{max}} = 1 - \frac{\beta_2}{\beta_1(1 + \beta_2 \langle \Delta H \rangle_C)}. \quad (8)$$

The latter only depends on the two temperatures and on the energy deviation from equilibrium at point  $C$ . We observe that the maximum efficiency is smaller than 1 and that the nonthermal reservoir can be described by an effective temperature,  $T_2^{\text{eff}} = T_2 + \langle \Delta H \rangle_C / k_B$ , that may be larger or smaller than that of the unperturbed thermal reservoir. This situation is reminiscent of that of molecular motors where the external driving is sometimes regarded as a nonequilibrium reservoir with an effective temperature (see e.g. Ref. [4], Sect. 3.4.2). We note, in addition, that the fact that Eq. (8) appears as the maximum efficiency of different kinds of quantum heat engines (Otto and in particular Carnot) strongly hints at its universal validity for all heat engines.

An important observation is that in thermodynamics the two thermal reservoirs are supposed to be given [1, 2]. In particular, the energetic cost of preparing, say, a high temperature reservoir in addition to an ambient low temperature reservoir is not taken into account in the calculation of the efficiency of a heat engine [38]. Such an inclusion would indeed lead to vanishing efficiencies due to the large (strictly speaking infinite) energy content of a proper heat reservoir. We here follow the same approach and consider the nonthermal reservoir as given. In this framework, the Carnot formula appears as an expression of the second law of thermodynamics for a particular form of nonequilibrium (two thermal reservoirs at different temperature), whereas the efficiency (8) applies to a more general form of nonequilibrium (one thermal and one nonthermal reservoir). In a similar manner, the maximum efficiency of 1 for molecular motors is a consequence of the second law for this yet different type of nonequilibrium [39]. It is worth noticing that Eq. (8) yields a non-zero result,  $\eta_{\text{max}} = \beta_2 \langle \Delta H \rangle_C / (1 + \beta_2 \langle \Delta H \rangle_C)$ , for isothermal reser-

voirs,  $\beta_1 = \beta_2$ . In this situation, which is akin to that of molecular motors, the nonthermal reservoir can be seen as an external nonequilibrium driving.

*Efficiency at maximum power.* The efficiency at maximum power is often a more relevant quantity than the maximum efficiency which corresponds to zero power [40]. In contrast to the latter, however, there does not seem to be a universal expression for the efficiency at maximum power; it not only usually depends on the optimization procedure, but also, as we will show, on the details of the nonthermal reservoir. The power output of a heat engine is defined as  $P = \langle W \rangle / \tau$ , where  $\tau$  is the duration of the cycle. In the following, we evaluate the maximum efficiency and the efficiency at maximum power for three different examples. For simplicity, we focus on adiabatic compression and expansion,  $Q_{1,2}^* = 1$ , since nonadiabatic processes lead to smaller efficiencies [26, 28], and to the high-temperature regime  $\beta_i \hbar\omega_i \ll 1$ .

(1) Let us begin with a heat engine strongly coupled to a hot reservoir. Strong coupling has recently been achieved experimentally in circuit QED [41] and optical systems [42]. In standard thermodynamics, the coupling to the reservoir is assumed to be vanishingly small [43]. For strong coupling, the stationary state of the quantum oscillator departs from its equilibrium expression and is characterized by the temperature of the reservoir and by the coupling strength  $\gamma$ . The corresponding deviation of the mean occupation number is given by [30],

$$\Delta \bar{n}_\gamma = \frac{\hbar \beta_2 \gamma \omega_D}{24 \omega_2}, \quad (9)$$

where  $\omega_D$  is the (large) cutoff frequency of the reservoir, modeled as an ensemble of harmonic oscillators. Since  $\Delta \bar{n}_\gamma > 0$ , the maximum efficiency (7) of the heat engine is larger than the Carnot efficiency. The total work produced by the engine is,

$$-\langle W \rangle = \frac{1}{\beta_1} \left( \frac{\omega_2}{\omega_1} - 1 \right) + \left( \frac{1}{\beta_2} + \hbar^2 \beta_2 \gamma \omega_D \right) \left( \frac{\omega_1}{\omega_2} - 1 \right). \quad (10)$$

Assuming that the initial frequency of the oscillator  $\omega_1$  (as well as  $\gamma$ ,  $\beta_1$ ,  $\beta_2$  and the cycle time) are fixed and by optimizing with respect to the second frequency  $\omega_2$ , we find that the power is maximum when  $\omega_1/\omega_2 = \sqrt{\beta_2 / (\beta_1 [1 + \hbar^2 \beta_2^2 \gamma \omega_D / 24])}$ . As a result, the efficiency at maximum power is given by,

$$\eta_\gamma = 1 - \sqrt{\frac{\beta_2}{\beta_1 (1 + \beta_2 \langle \Delta H \rangle_C)}}. \quad (11)$$

Equation (11) reduces to the Curzon-Ahlborn expression [40] for vanishing coupling and generally exceeds it when  $\langle \Delta H \rangle_C > 0$ , that is,  $\gamma > 0$ . Remarkably, Eq. (11) can be expressed in terms of the same effective temperature as Eq. (8). In the limit of small temperature differences and small  $\langle \Delta H \rangle_C$ , we moreover have  $\eta_\gamma \simeq \eta_c / 2 + \beta_2^2 \langle \Delta H \rangle_C / (2\beta_1) \geq \eta_c / 2$ ; this result therefore lies beyond the range of the usual linear regime [10–12].

(2) We now consider a quantum photo-engine made of a single mode (the harmonic oscillator) in a resonant cavity with moving mirrors, and coupled to a beam of thermal two-level atoms that pass through the cavity [22, 23]. When the atoms are uncorrelated, the beam plays the role of a thermal reservoir. By contrast, for correlated atoms the engineered reservoir is nonthermal. For pairwise thermally entangled atoms, the deviation of the mean occupation number from equilibrium is [23],

$$\Delta\bar{n}_{\lambda:1} = \frac{\beta_2 \hbar \lambda^2}{4\omega_2}, \quad \Delta\bar{n}_{\lambda:2} = -\frac{\lambda}{2\omega_2}, \quad (12)$$

when respectively one or the two atoms of a correlated pair fly through the cavity, in the limit of high temperature,  $\beta_i \hbar \omega_i \ll 1$ , and weak correlation,  $\beta_i \hbar \lambda \ll 1$ . Here  $\lambda$  is the strength of the interaction that created the thermal entangled pair. In both cases, the deviation of the mean occupation number is inversely proportional to the frequency  $\omega_2$ , as for the strongly coupled reservoir discussed above. As a consequence, the efficiency at maximum power of the heat engine is given by Eq. (11). We note that the maximum efficiency (7) is larger than the Carnot expression when one atom flies through the cavity and smaller when the two atoms of a pair pass through it. Likewise, the efficiency at maximum power (11) is larger or smaller than the Curzon-Ahlborn efficiency whether one or two atoms fly through the cavity.

(3) A quantum coherent nonthermal reservoir can be created by sending through the optical cavity a beam of thermal three-level atoms whose degenerate ground states are prepared in a coherent superposition with relative phase  $\phi$ . In the high-temperature limit, the deviation of the mean occupation number is [22],

$$\Delta\bar{n}_\phi = -\frac{1}{(\hbar\beta_2\omega_2)^2} \varepsilon \cos \phi, \quad (13)$$

where  $\varepsilon$  is proportional to the amplitude of the atomic coherence. Here  $\Delta\bar{n}$  is inversely proportional to the square of the frequency  $\omega_2$ . The total work produced by the heat engine can be readily written as,

$$-\langle W \rangle = \frac{1}{\beta_1} \left( \frac{\omega_2}{\omega_1} - 1 \right) + \frac{1}{\beta_2} \left( \frac{\omega_1}{\omega_2} - 1 \right) \left( 1 - \frac{\varepsilon \cos \phi}{\hbar\beta_2\omega_2} \right). \quad (14)$$

By maximizing the power with respect to  $\omega_2$ , keeping all other parameters constant as before, we find that the power is maximum when,

$$\frac{\omega_2}{\omega_1} = \sqrt{\frac{\beta_2}{\beta_1}} \left[ 1 - \frac{\varepsilon \cos \phi}{2\hbar\beta_2\omega_1} \left( 1 - 2\sqrt{\frac{\beta_1}{\beta_2}} \right) \right], \quad (15)$$

in a perturbation expansion for small values of  $\varepsilon$  [44]. The resulting efficiency at maximum power is then

$$\eta_\phi = 1 - \sqrt{\frac{\beta_2}{\beta_1}} \left[ 1 - \frac{\varepsilon \cos \phi}{2\hbar\beta_2\omega_1} \left( 1 - 2\sqrt{\frac{\beta_1}{\beta_2}} \right) \right]. \quad (16)$$

The maximum efficiency (7) and the efficiency at maximum power (16) exceed their thermal counterparts when the condition  $\cos \phi < 0$  is satisfied.

*Generalization.* The above results can be extended to situations where the two reservoirs are nonthermal. For instance, the efficiency of the quantum Otto engine is,

$$\eta = 1 - \frac{\omega_1 (\bar{n}_1 + \Delta\bar{n}_1 + 1/2) - Q_2^* (\bar{n}_2 + \Delta\bar{n}_2 + 1/2)}{\omega_2 (\bar{n}_1 + \Delta\bar{n}_1 + 1/2) Q_1^* - (\bar{n}_2 + \Delta\bar{n}_2 + 1/2)}, \quad (17)$$

where  $\Delta\bar{n}_i$  is the deviation of the mean occupation number for the nonthermal reservoir  $i$  ( $i = 1, 2$ ). The corresponds high-temperature maximum efficiency follows as,

$$\begin{aligned} \eta_{\max} &= \eta_c + \beta_2 \left( \frac{\omega_1}{\omega_2} \langle \Delta H \rangle_C - \langle \Delta H \rangle_A \right), \\ &= 1 - \frac{\beta_2}{\beta_1 [1 + \beta_2 (\langle \Delta H \rangle_C - (\omega_2/\omega_1) \langle \Delta H \rangle_A)]}, \end{aligned} \quad (18)$$

where  $\langle \Delta H \rangle_A = \langle H \rangle_A - \langle H \rangle_A^{\text{eq}}$  is the deviation of the energy of the oscillator from its equilibrium value at point  $A$ . The efficiency (18) is larger than the Carnot efficiency when  $\omega_1 \langle \Delta H \rangle_C - \omega_2 \langle \Delta H \rangle_A > 0$ . It is interesting to note that Eq. (18) can again be expressed in terms of an effective temperature,  $T_2^{\text{eff}} = T_2 + (\langle \Delta H \rangle_C - (\omega_2/\omega_1) \langle \Delta H \rangle_A)/k_B$ , that only depends on the average deviations at point  $A$  and  $C$  and not at points  $B$  or  $D$ .

So far we have implicitly assumed that the reservoir with the highest temperature also leads to the oscillator state with the highest energy, and vice versa. While this is true for thermal reservoirs, it is not necessarily true for general nonthermal reservoirs; the average energy at point  $A$  could, for example, be higher than the average energy at point  $C$ . This issue can be addressed by adapting the definition of the efficiency (5) and generalizing the Clausius statement of the second law, replacing *hot* by *high energy* and *cold* by *low energy*.

*Conclusions.* Combining the efficiency of a quantum Otto engine and the second of law of thermodynamics, we have computed the maximum efficiency of a heat engine operating between nonthermal stationary reservoirs. We have shown that the latter can be expressed in terms of an effective temperature which characterizes the deviation from thermal equilibrium. We have further established that the maximum efficiency exceeds the Carnot bound when the effective temperature is larger than the high temperature. We have in addition evaluated the efficiency at maximum power for three cases of interest. Our results provide a theoretical framework for a new class of engineered heat engines that interpolate between standard heat engines and molecular motors.

This work was supported by the DFG (contract No LU1382/4-1) and the Alexander von Humboldt Foundation.

- 
- [1] H. B. Callen, *Thermodynamics and an Introduction to Thermostatistics* (Wiley, New York, 1985).
- [2] Y.A. Cengel and M.A. Boles, *Thermodynamics. An Engineering Approach*, (McGraw-Hill, New York, 2001).
- [3] F. Jülicher, A. Ajdari, and J. Prost, *Rev. Mod. Phys.* **69**, 1269 (1997).
- [4] P. Reimann, *Phys. Rep.* **361**, 57 (2002).
- [5] E.R. Kay, D.A. Leigh, and F. Zerbetto, *Angew. Chem. Int. Ed.* **46**, 72 (2007).
- [6] P. Hänggi and F. Marchesoni, *Rev. Mod. Phys.* **81**, 387 (2009).
- [7] A. Parmeggiani, F. Jülicher, A. Ajdari, and J. Prost, *Phys. Rev. E* **60**, 2127 (1999).
- [8] R. D. Astumian, *Proc. Natl. Acad. Sci. U.S.A.* **104**, 19715 (2007).
- [9] S. Toyabe, T. Okamoto, T. Watanabe-Nakayama, H. Taketani, S. Kudo, and E. Muneyuki, *Phys. Rev. Lett.* **104**, 198103 (2010).
- [10] T. Schmiedl and U. Seifert, *Europhys. Lett.* **81**, 20003 (2008).
- [11] M. Esposito, K. Lindenberg, and C. Van den Broeck, *Phys. Rev. Lett.* **102**, 130602 (2009).
- [12] M. Esposito, R. Kawai, K. Lindenberg, and C. Van den Broeck, *Phys. Rev. Lett.* **105**, 150603 (2010).
- [13] U. Seifert, *Phys. Rev. Lett.* **106**, 020601 (2011).
- [14] C. Van den Broeck, N. Kumar, and K. Lindenberg, *Phys. Rev. Lett.* **108**, 210602 (2012).
- [15] J.F. Poyatos, J.I. Cirac, and P. Zoller, *Phys. Rev. Lett.* **77**, 4728 (1996).
- [16] C.J. Myatt, B.E. King, Q.A. Turchette, C.A. Sackett, D. Kielpinski, W.M. Itano, C. Monroe, and D.J. Wineland, *Nature (London)* **403**, 269 (2000).
- [17] S. Pielawa, G. Morigi, D. Vitali, and L. Davidovich, *Phys. Rev. Lett.* **98**, 240401 (2007).
- [18] A. Sarlette, J. M. Raimond, M. Brune, and P. Rouchon, *Phys. Rev. Lett.* **107**, 010402 (2011).
- [19] S. Diehl, A. Micheli, A. Kantian, B. Kraus, H. P. Büchler, and P. Zoller, *Nature Phys.* **4**, 878 (2008).
- [20] F. Verstraete, M.M. Wolf, and J.I. Cirac, *Nature Phys.* **5**, 633 (2009).
- [21] Y.-D. Wang and A.A. Clerk, arXiv:1301.5553.
- [22] M.O. Scully, M.S. Zubairy, G.S. Agarwal, and H. Walther, *Science* **299**, 862 (2003).
- [23] R. Dillenschneider and E. Lutz, *Europhys. Lett.* **88**, 50003 (2009).
- [24] M. O. Scully, *Phys. Rev. Lett.* **88**, 050602 (2002).
- [25] B. Lin and J. Chen, *Phys. Rev. E* **67**, 046105 (2003).
- [26] Y. Rezek and R. Kosloff, *New J. Phys.* **8**, 83 (2006).
- [27] H.T. Quan, Y.X. Liu, C.P. Sun, and F. Nori, *Phys. Rev. E* **76**, 031105 (2007).
- [28] O. Abah, J. Rossnagel, G. Jakob, S. Deffner, F. Schmidt-Kaler, K. Singer, and E. Lutz, *Phys. Rev. Lett.* **109**, 203006 (2012).
- [29] M. Campisi, P. Talkner, and P. Hänggi, *Phys. Rev. Lett.* **102**, 210401 (2009).
- [30] S. Hilt, B. Thomas, and E. Lutz, *Phys. Rev. E* **84**, 031110 (2011).
- [31] T. Hill, *Statistical Mechanics* (McGraw-Hill, New York, 1956).
- [32] For any nonnormalized nonequilibrium operator  $\rho'_2$ , we define the normalized operator  $\rho_2 = \rho'_2 / \text{tr} \{\rho'_2\}$ . We then have  $\Delta H_2 = -[\ln \rho_2 + \ln \text{tr} \{\rho'_2\}] / \beta_2 - H_2$ .
- [33] E. Fermi, *Thermodynamics*, (Dover, New York, 1956).
- [34] K. Husimi, *Prog. Theor. Phys.* **9**, 381 (1953).
- [35] S. Deffner and E. Lutz, *Phys. Rev. E* **77**, 021128 (2008).
- [36] S. Deffner, O. Abah, and E. Lutz, *Chem. Phys.* **375**, 200 (2010).
- [37] R. Clausius, *The Mechanical Theory of Heat*, (Macmillan, London, 1879), page 78.
- [38] In a similar way, the evaluation of the efficiency of a car engine does not include the energetic cost of extracting, refining and transporting oil to the gas station.
- [39] J. Parrondo and B. de Cisneros, *Appl. Phys. A: Mater. Sci. Process.* **75**, 179 (2002).
- [40] F.L. Curzon and B. Ahlborn, *Am. J. Phys.* **43**, 22 (1975).
- [41] P. Forn-Diaz, J. Lisenfeld, D. Marcos, J.J. Garcia-Ripoll, E. Solano, C.J.P.M. Harmans, and J.E. Mooij, *Phys. Rev. Lett.* **105**, 237001 (2010).
- [42] A. Crespi, S. Longhi, and R. Osellame, *Phys. Rev. Lett.* **108**, 163601 (2012).
- [43] R. Kubo, *Thermodynamics* (North-Holland, Amsterdam, 1968).
- [44] C.M. Bender and S.A. Orszag, *Advanced Mathematical Methods for Scientists and Engineers*, (McGraw-Hill, New York, 1978), Sect 7.1